

Deye

Clean Power For You

Ningbo Deye Inverter Technology Co., Ltd.

EU Distribution

Add: No. 26 South Yongjiang Road, Daqi, Beilun, NingBo, Zhejiang,

Tel +48 22 100 59 62

E-mail: contact@deyeinverter.eu Web: www.deyeinverter.eu

Note The technical data above mentioned may be updated or revised due to product development. The data in this brochure is subject to change without notice. The latest datasheet and catalogue can be acquired via contact@deyeinverter.eu

Ver 1.1 2024

Deye Inverter



www.deyeinverter.eu



contact@deyeinverter.eu



World-leading Energy Storage System Provider

Choose Deye Choose a Green and Healthy Life

Deye

2024



Company Profile

1

Ningbo Deye Inverter Technology Co., Ltd. founded in 2007 with registered capital 56 million USD, is one of the China's high-tech enterprises and a subsidiary of Deye Group. With a plant area over 15,000m² and complete production and testing equipment, Deye has become a major player in the global solar inverter market.

2

Ningbo Deye Inverter Technology Co., Ltd. is dedicated to providing complete photovoltaic power system solutions, including residential and commercial power plants solutions. Also, Deye offers solar energy storage system solutions. Among them, PV grid-connected inverter power range from 1.5-110kW, Hybrid inverter 3kW-50kW, and microinverter 300W-2000W.

3

As a technology-oriented company, Deye has always been committing to research and develop new cutting-edge technologies to provide efficiency and reliable products. For example, Deye adopts T-type three-level topology and enhanced SVPWM algorithm to further improve the conversion efficiency by 0.7% compared with common SPWM. With frequency droop control technology, Deye string inverter is able to work with diesel generator, which greatly expands the scope of the product application.



Read more

Milestones

2022

Launched the latest generation of 50kW hybrid inverter, equipped with independent two-way battery terminal port.

2021

Deye Group was successfully listed on SSE of China in 2021, Stock Code 605117.SH.

30,000 pcs⁺

By the end of 2019, with total shipments 30,000+, Deye hybrid inverter has become Top 3 in South Africa, Pakistan and Top 1 Chinese brand in USA.

2017

Deye has launched first generation hybrid inverter and attracted a lot of attention with many unique features such as V/f droop control technology and battery DC / DC topology etc...

2007

Founded in 2007 with registered capital of 56 million USD.

LIMITLESS

Core Technology

Deye hybrid inverter 3-50kW with 208/230/240/400Vac

4

Automatic switching time 4ms

6

6 time periods for battery charging/discharging

16

V/f droop control, Max. 16pcs in parallel

24

Supports using diesel generator to charge battery directly, ensuring system energy supply 7-24H

96.5

Max. conversion efficiency of 97.6% Max. battery charge efficiency of 96.5%

290

Max. charging/discharging current of 290A



Capable | Intelligent | User-friendly | Safety

Reduce your electricity bill and improve your energy independence Your ideal residential solar energy storage solution

Core Features

Deye grid-connected inverter 1-136kW


- ✓ Max. 8 MPP trackers, Max. efficiency up to 98.9%
- ✓ High DC/AC ratio 1.5 times for more yields
- ✓ Wide output voltage range 277-520Vac
- ✓ Zero export application, response speed within 0.5S
- ✓ T-type three-level topology and enhanced SVPWM
- ✓ Type II DC / AC SPD, frequency droop control technology
- ✓ Max. DC input current of 16A/string, adapt to 600W solar panel
- ✓ String intelligent monitoring (optional), Ani-PID function (Optional)



Main Highlights


Deye microinverter 300-2200W

- ◆ Support reactive power compensation, comply with UL code.
- ◆ Module level monitoring, Max. 4 MPPTs design
- ◆ Max. DC input current 13A, adapt to 600W PV module
- ◆ Rapid shutdown function, safe and reliable
- ◆ Zigbee or WIFI communication
- ◆ IP67 protection degree, 10 years warranty

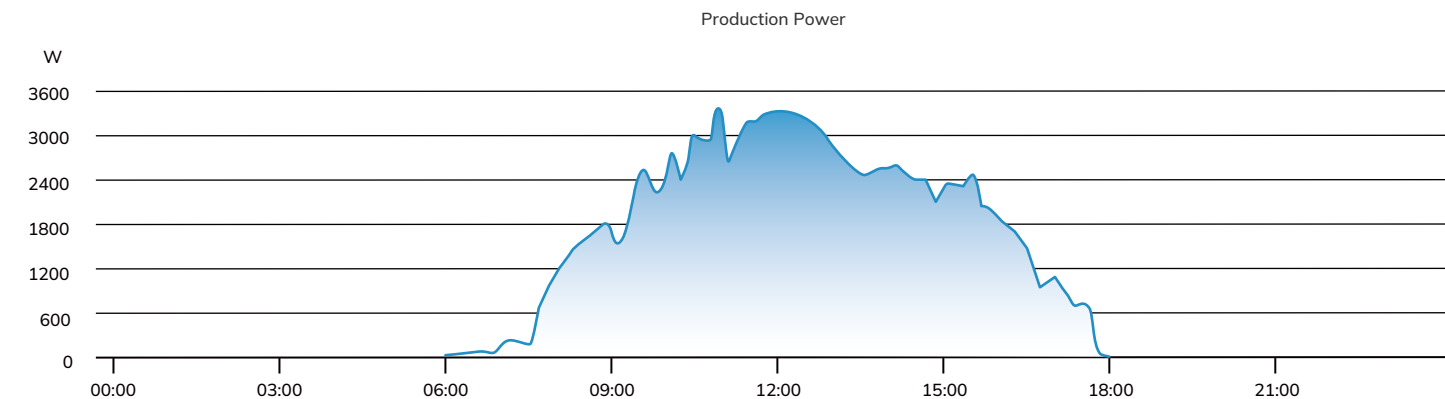

Physical Layout

0W	200 W	180 W	150 W
170 W	170 W	280 W	250 W
270 W	280 W	260 W	240 W

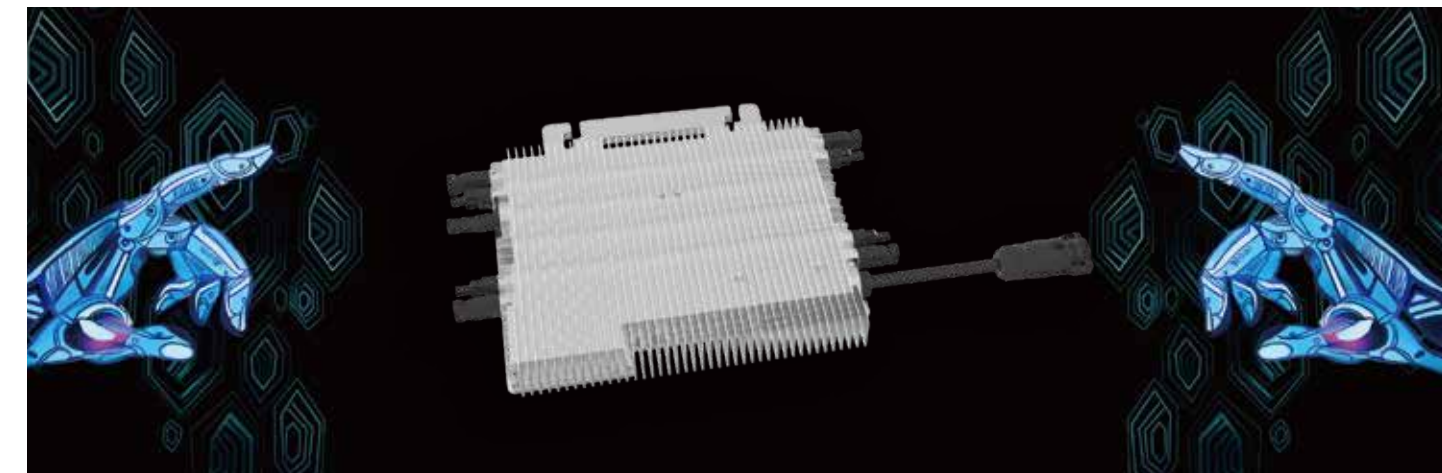




World-Class Components Suppliers

Deye chooses world-class suppliers to ensure the high quality of its products.

MOSFET, IGBT



Complete
Manufacturing
System

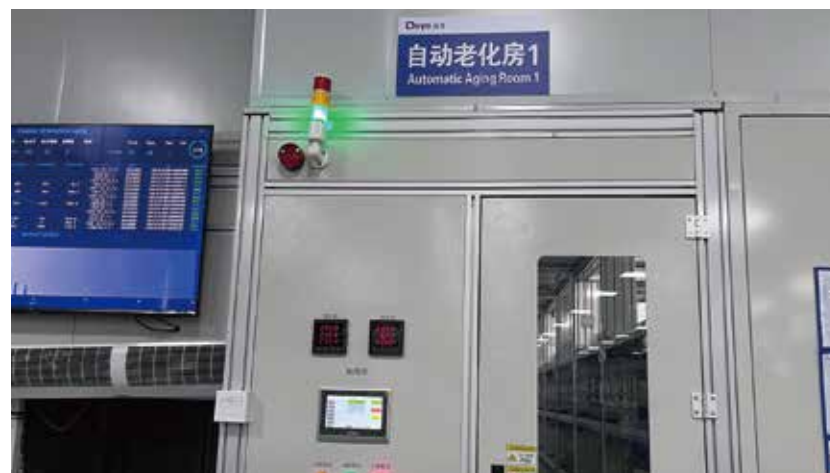

Capacitor, Inductor



Diode



Relay



FAN




Deye Inverter Portfolio



Single Phase
String Inverter




Three Phase
String Inverter

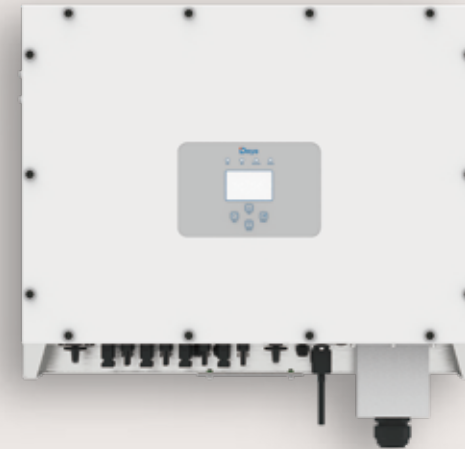

Three Phase
String Inverter (LV)



Single Phase
Hybrid Inverter

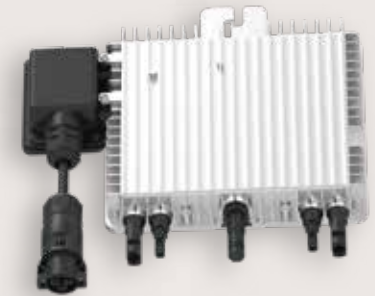

Microinverter



Three Phase
Hybrid Inverter



Accessory
monitoring

Single Phase String Inverter

SUN-1/1.5/2/2.5/3/K-G04



-  1 MPP tracker, Max. efficiency up to 97.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Low start-up voltage of 80V

Technical Data

Model	SUN-1K-G04	SUN-1.5K-G04	SUN-2K-G04	SUN-2.5K-G04	SUN-3K-G04
PV String Input Data					
Max. PV Input Power (kW)	1.3	2	2.6	3.3	3.9
Max. PV Input Voltage (V)	550				
Start-up Voltage (V)	80				
MPPT Voltage Range (V)	70-500				
Rated PV Input Voltage (V)	360				
Max. Operating PV Input Current (A)	20				
Max. Input Short Circuit Current (A)	30				
No. of MPPT Trackers/No. of Strings per MPPT Tracker	1/1				
AC Output Data					
Rated AC Output Active Power(kW)	1	1.5	2	2.5	3
Max. AC Output Apparent Power(kVA)	1.1	1.65	2.2	2.75	3.3
Rated AC Output current (A)	4.5/4.3	6.8/6.5	9.1/8.7	11.4/10.9	13.6/13
Max. AC Output Current(A)	5/4.8	7.5/7.2	10/9.6	12.5/12	15/14.3
Rated Output voltage/range (V)	220/230 0.85Un-1.1Un				
Grid Connection Form	L/N/PE				
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Total Current Harmonic Distortion THDi	<3%				
DC Injection Current	<0.5%In				
Efficiency					
Max. Efficiency	97.3%				
Euro Efficiency	96.3%				
MPPT Efficiency	>99%				
Equipment Protection					
DC Polarity Reverse Connection Protection	Yes				
AC Output Overcurrent Protection	Yes				
AC Output Overvoltage Protection	Yes				
AC Output Short Circuit Protection	Yes				
Thermal Protection	Yes				
DC Terminal Insulation Impedance Monitoring	Yes				
DC Component Monitoring	Yes				
Ground Fault Current Monitoring	Yes				
Power Network Monitoring	Yes				
Island Protection Monitoring	Yes				
Earth Fault Detection	Yes				
Overvoltage Load Drop Protection	Yes				
Residual Current (RCD) Detection	Yes				
Surge Protection Level	TYPE II(DC), TYPE III(AC)				
Interface					
Communication Interface	RS485/RS232 /WiFi/LAN				
General Data					
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude (m)	2000m				
Noise (dB)	≤ 35 dB(A)				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (mm)	280W×310H×184 D (Excluding Connectors and Brackets)				
Weight (kg)	4.8				
Warranty	12 Years				
Type of Cooling	Natural Cooling				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105				
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Single Phase String Inverter

SUN-3.6/4/5/6K-G



-  2 MPP trackers, Max. efficiency up to 97.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Low start-up voltage of 80V

Technical Data

Model	SUN-3.6K-G		SUN-4K-G		SUN-5K-G		SUN-6K-G	
PV String Input Data								
Max. PV Input Power (kW)	4.7		5.2		6.5		7.8	
Max. PV Input Voltage (V)	550							
Start-up Voltage (V)	80							
MPPT Voltage Range (V)	70-500							
Rated PV Input Voltage (V)	360							
Max. Operating PV Input Current (A)	13+13							
Max. Input Short Circuit Current (A)	19.5+19.5							
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/1+1							
AC Output Data								
Rated AC Output Active Power(kW)	3.6		4		5		6	
Max. AC Output Apparent Power(kVA)	3.96		4.4		5.5		6.6	
Rated AC Output current (A)	16.4/15.7		18.2/17.4		22.7/21.7		27.3/26.1	
Max. AC Output Current(A)	18/17.2		20/19.1		25/23.9		30/28.7	
Rated Output voltage/range (V)	220/230 0.85Un-1.1Un							
Grid Connection Form	L/N/PE							
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65							
Power Factor Adjustment Range	0.8 leading to 0.8 lagging							
Total Current Harmonic Distortion THDi	<3%							
DC Injection Current	<0.5%In							
Efficiency								
Max. Efficiency	97.3%		97.5%					
Euro Efficiency	96.9%		97.0%					
MPPT Efficiency	>99%							
Equipment Protection								
DC Polarity Reverse Connection Protection					Yes			
AC Output Overcurrent Protection					Yes			
AC Output Overvoltage Protection					Yes			
AC Output Short Circuit Protection					Yes			
Thermal Protection					Yes			
DC Terminal Insulation Impedance Monitoring					Yes			
DC Component Monitoring					Yes			
Ground Fault Current Monitoring					Yes			
Power Network Monitoring					Yes			
Island Protection Monitoring					Yes			
Earth Fault Detection					Yes			
Overvoltage Load Drop Protection					Yes			
Residual Current (RCD) Detection					Yes			
Surge Protection Level	TYPE II(DC), TYPE III(AC)							
Interface								
Communication Interface	RS485/RS232 /WiFi/LAN							
General Data								
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating							
Permissible Ambient Humidity	0-100%							
Permissible Altitude (m)	2000m							
Noise (dB)	≤ 35 dB(A)							
Ingress Protection(IP) Rating	IP 65							
Inverter Topology	Non-Isolated							
Over Voltage Category	OVC II(DC), OVC III(AC)							
Cabinet Size (mm)	330W×323H×190D(Excluding Connectors and Brackets)							
Weight (kg)	8							
Warranty	12 Years							
Type of Cooling	Natural Cooling							
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105							
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2							

Three Phase String Inverter

SUN-3/4/5/6/7/8/9/10/12K-G05



2 MPP trackers, Max. efficiency up to 98.3%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Technical Data

Model	SUN-3K-G05	SUN-4K-G05	SUN-5K-G05	SUN-6K-G05	SUN-7K-G05	SUN-8K-G05	SUN-9K-G05	SUN-10K-G05	SUN-12K-G05
PV String Input Data									
Max. PV Input Power (kW)	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13	15.6
Max. PV Input Voltage (V)	1100								
Start-up Voltage (V)	140								
MPPT Voltage Range (V)	120-1000								
Rated PV Input Voltage (V)	600								
Max. Operating PV Input Current (A)	13+13								
Max. Input Short Circuit Current (A)	19.5+19.5								
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/1+1								
AC Output Data									
Rated AC Output Active Power(kW)	3	4	5	6	7	8	9	10	12
Max. AC Output Apparent Power(kVA)	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11	13.2
Rated AC Output current (A)	4.5/4.3	6.1/5.8	7.6/7.2	9.1/8.7	10.6/10.1	12.1/11.6	13.7/13.1	15.2/14.5	18.2/17.4
Max. AC Output Current(A)	5/4.8	6.7/6.4	8.3/8	10/9.6	11.7/11.1	13.3/12.8	15/14.4	16.7/16	20/19.2
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un								
Grid Connection Form	3L/N/PE								
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65								
Power Factor Adjustment Range	0.8 leading to 0.8 lagging								
Total Current Harmonic Distortion THDi	<3%								
DC Injection Current	<0.5%In								
Efficiency									
Max. Efficiency	98.1%		98.2%		98.3%				
Euro Efficiency	97.5%		97.6%		97.8%				
MPPT Efficiency	>99%								
Equipment Protection									
DC Polarity Reverse Connection Protection	Yes								
AC Output Overcurrent Protection	Yes								
AC Output Overvoltage Protection	Yes								
AC Output Short Circuit Protection	Yes								
Thermal Protection	Yes								
DC Terminal Insulation Impedance Monitoring	Yes								
DC Component Monitoring	Yes								
Ground Fault Current Monitoring	Yes								
Power Network Monitoring	Yes								
Island Protection Monitoring	Yes								
Earth Fault Detection	Yes								
Overvoltage Load Drop Protection	Yes								
Residual Current (RCD) Detection	Yes								
Surge Protection Level	TYPE II(DC), TYPE III(AC)								
Interface									
Communication Interface	RS485/RS232 /WiFi/LAN								
General Data									
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating								
Permissible Ambient Humidity	0-100%								
Permissible Altitude (m)	4000m								
Noise (dB)	≤ 45 dB(A)								
Ingress Protection(IP) Rating	IP 65								
Inverter Topology	Non-Isolated								
Over Voltage Category	OVC II(DC), OVC III(AC)								
Cabinet Size (mm)	283W×463H×178D(Excluding Connectors and Brackets)								
Weight (kg)	11								
Warranty	12 Years								
Type of Cooling	Natural Cooling								
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105								
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2								

Three Phase String Inverter

SUN-3/4/5/6/7/8/9/10/12K-G05-P



-  2 MPP trackers, Max. efficiency up to 98.3%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-3K-G05-P SUN-4K-G05-P SUN-5K-G05-P SUN-6K-G05-P SUN-7K-G05-P SUN-8K-G05-P SUN-9K-G05-P SUN-10K-G05-P SUN-12K-G05-P								
PV String Input Data									
Max. PV Input Power (kW)	3.9	5.2	6.5	7.8	9.1	10.4	11.7	13	15.6
Max. PV Input Voltage (V)	1100								
Start-up Voltage (V)	140								
MPPT Voltage Range (V)	120-1000								
Rated PV Input Voltage (V)	600								
Max. Operating PV Input Current (A)	20+20								
Max. Input Short Circuit Current (A)	30+30								
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/1+1								
AC Output Data									
Rated AC Output Active Power(kW)	3	4	5	6	7	8	9	10	12
Max. AC Output Apparent Power(kVA)	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11	13.2
Rated AC Output current (A)	4.5/4.3	6.1/5.8	7.6/7.2	9.1/8.7	10.6/10.1	12.1/11.6	13.7/13.1	15.2/14.5	18.2/17.4
Max. AC Output Current(A)	5/4.8	6.7/6.4	8.3/8	10/9.6	11.7/11.1	13.3/12.8	15/14.4	16.7/16	20/19.2
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un								
Grid Connection Form	3L/N/PE								
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65								
Power Factor Adjustment Range	0.8 leading to 0.8 lagging								
Total Current Harmonic Distortion THDi	<3%								
DC Injection Current	<0.5%In								
Efficiency									
Max. Efficiency	98.1%		98.2%		98.3%				
Euro Efficiency	97.5%		97.6%		97.8%				
MPPT Efficiency	>99								
Equipment Protection									
DC Polarity Reverse Connection Protection	Yes								
AC Output Overcurrent Protection	Yes								
AC Output Overvoltage Protection	Yes								
AC Output Short Circuit Protection	Yes								
Thermal Protection	Yes								
DC Terminal Insulation Impedance Monitoring	Yes								
DC Component Monitoring	Yes								
Ground Fault Current Monitoring	Yes								
Power Network Monitoring	Yes								
Island Protection Monitoring	Yes								
Earth Fault Detection	Yes								
Overvoltage Load Drop Protection	Yes								
Residual Current (RCD) Detection	Yes								
Surge Protection Level	TYPE II(DC), TYPE III(AC)								
Interface									
Communication Interface	RS485/RS232 /WiFi/LAN								
General Data									
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating								
Permissible Ambient Humidity	0-100%								
Permissible Altitude (m)	4000m								
Noise (dB)	≤ 45 dB(A)								
Ingress Protection(IP) Rating	IP 65								
Inverter Topology	Non-Isolated								
Over Voltage Category	OVC II(DC), OVC III(AC)								
Cabinet Size (mm)	283W×463H×178D(Excluding Connectors and Brackets)								
Weight (kg)	11								
Warranty	12 Years								
Type of Cooling	Natural Cooling								
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105								
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2								

Three Phase String Inverter

SUN-15K-G05



2 MPP trackers, Max. efficiency up to 98.5%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Technical Data

Model	SUN-15K-G05
PV String Input Data	
Max. PV Input Power (kW)	19.5
Max. PV Input Voltage (V)	1000
Start-up Voltage (V)	250
MPPT Voltage Range (V)	200-850
Rated PV Input Voltage (V)	600
Max. Operating PV Input Current (A)	13+26
Max. Input Short Circuit Current (A)	19.5+39
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/1+1
AC Output Data	
Rated AC Output Active Power(kW)	15
Max. AC Output Apparent Power(kVA)	16.5
Rated AC Output current (A)	22.7/21.7
Max. AC Output Current(A)	25/23.9
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un
Grid Connection Form	3L/N/PE
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Total Current Harmonic Distortion THDi	<3%
DC Injection Current	<0.5%In
Efficiency	
Max. Efficiency	98.5%
Euro Efficiency	98%
MPPT Efficiency	>99%
Equipment Protection	
DC Polarity Reverse Connection Protection	Yes
AC Output Overcurrent Protection	Yes
AC Output Overvoltage Protection	Yes
AC Output Short Circuit Protection	Yes
Thermal Protection	Yes
DC Terminal Insulation Impedance Monitoring	Yes
DC Component Monitoring	Yes
Ground Fault Current Monitoring	Yes
Power Network Monitoring	Yes
Island Protection Monitoring	Yes
Earth Fault Detection	Yes
Overvoltage Load Drop Protection	Yes
Residual Current (RCD) Detection	Yes
Surge Protection Level	TYPE II(DC), TYPE II(AC)
Interface	
Communication Interface	RS485/RS232 /WiFi/LAN
General Data	
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating
Permissible Ambient Humidity	0-100%
Permissible Altitude (m)	4000m
Noise (dB)	≤ 40 dB(A)
Ingress Protection(IP) Rating	IP 65
Inverter Topology	Non-Isolated
Over Voltage Category	OVC II(DC), OVC III(AC)
Cabinet Size (mm)	333Wx472Hx203D(Excluding Connectors and Brackets)
Weight (kg)	15
Warranty	12 Years
Type of Cooling	Natural Cooling
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

Three Phase String Inverter

SUN-15K-G05-P



-  2 MPP trackers, Max. efficiency up to 98.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-15K-G05-P
PV String Input Data	
Max. PV Input Power (kW)	19.5
Max. PV Input Voltage (V)	1000
Start-up Voltage (V)	250
MPPT Voltage Range (V)	200-850
Rated PV Input Voltage (V)	600
Max. Operating PV Input Current (A)	20+26
Max. Input Short Circuit Current (A)	30+39
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/1+1
AC Output Data	
Rated AC Output Active Power(kW)	15
Max. AC Output Apparent Power(kVA)	16.5
Rated AC Output current (A)	22.7/21.7
Max. AC Output Current(A)	25/23.9
Rated Output voltage/range (V)	380V/323V-418V, 400V/340V-440V
Grid Connection Form	3L/N/PE
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Total Current Harmonic Distortion THDi	<3%
DC Injection Current	<0.5%In
Efficiency	
Max. Efficiency	98.5%
Euro Efficiency	98%
MPPT Efficiency	>99%
Equipment Protection	
DC Polarity Reverse Connection Protection	Yes
AC Output Overcurrent Protection	Yes
AC Output Overvoltage Protection	Yes
AC Output Short Circuit Protection	Yes
Thermal Protection	Yes
DC Terminal Insulation Impedance Monitoring	Yes
DC Component Monitoring	Yes
Ground Fault Current Monitoring	Yes
Power Network Monitoring	Yes
Island Protection Monitoring	Yes
Earth Fault Detection	Yes
Overvoltage Load Drop Protection	Yes
Residual Current (RCD) Detection	Yes
Surge Protection Level	TYPE II(DC), TYPE II(AC)
Interface	
Communication Interface	RS485/RS232 /WiFi/LAN
General Data	
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating
Permissible Ambient Humidity	0-100%
Permissible Altitude (m)	4000m
Noise (dB)	≤ 40 dB(A)
Ingress Protection(IP) Rating	IP 65
Inverter Topology	Non-Isolated
Over Voltage Category	OVC II(DC), OVC III(AC)
Cabinet Size (mm)	333W×472H×203D(Excluding Connectors and Brackets)
Weight (kg)	15
Warranty	12 Years
Type of Cooling	Natural Cooling
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

Three Phase String Inverter

SUN-18/20/25K-G04



2 MPP trackers, Max. efficiency up to 98.6%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range




Anti-PID function (Optional)

Technical Data

Model	SUN-18K-G04		SUN-20K-G04		SUN-25K-G04	
PV String Input Data						
Max. PV Input Power (kW)	23.4		26		32.5	
Max. PV Input Voltage (V)	1100					
Start-up Voltage (V)	250					
MPPT Voltage Range (V)	200-1000					
Rated PV Input Voltage (V)	600					
Max. Operating PV Input Current (A)	26+26					
Max. Input Short Circuit Current (A)	39+39					
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/2+2					
AC Output Data						
Rated AC Output Active Power(kW)	18		20		25	
Max. AC Output Apparent Power(kVA)	19.8		22		27.5	
Rated AC Output current (A)	27.3/26.1		30.3/29		37.9/36.2	
Max. AC Output Current(A)	30/28.7		33.3/31.9		41.7/39.8	
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un					
Grid Connection Form	3L/N/PE					
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65					
Power Factor Adjustment Range	0.8 leading to 0.8 lagging					
Total Current Harmonic Distortion THDi	<3%					
DC Injection Current	<0.5%In					
Efficiency						
Max. Efficiency	98.5%					
Euro Efficiency	98%					
MPPT Efficiency	>99%					
Equipment Protection						
DC Polarity Reverse Connection Protection	Yes					
AC Output Overcurrent Protection	Yes					
AC Output Overvoltage Protection	Yes					
AC Output Short Circuit Protection	Yes					
Thermal Protection	Yes					
DC Terminal Insulation Impedance Monitoring	Yes					
DC Component Monitoring	Yes					
Ground Fault Current Monitoring	Yes					
Power Network Monitoring	Yes					
Island Protection Monitoring	Yes					
Earth Fault Detection	Yes					
Overvoltage Load Drop Protection	Yes					
Residual Current (RCD) Detection	Yes					
Surge Protection Level	TYPE II(DC), TYPE III(AC)					
Interface						
Communication Interface	RS485/RS232 /WiFi/LAN					
General Data						
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating					
Permissible Ambient Humidity	0-100%					
Permissible Altitude (m)	2000m					
Noise (dB)	≤ 40 dB(A)					
Ingress Protection(IP) Rating	IP 65					
Inverter Topology	Non-Isolated					
Over Voltage Category	OVC II(DC), OVC III(AC)					
Cabinet Size (mm)	362W×577H×215 D (Excluding Connectors and Brackets)					
Weight (kg)	23					
Warranty	12 Years					
Type of Cooling	Natural Cooling					
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105					
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					

Three Phase String Inverter

SUN-30/33/36K-G04

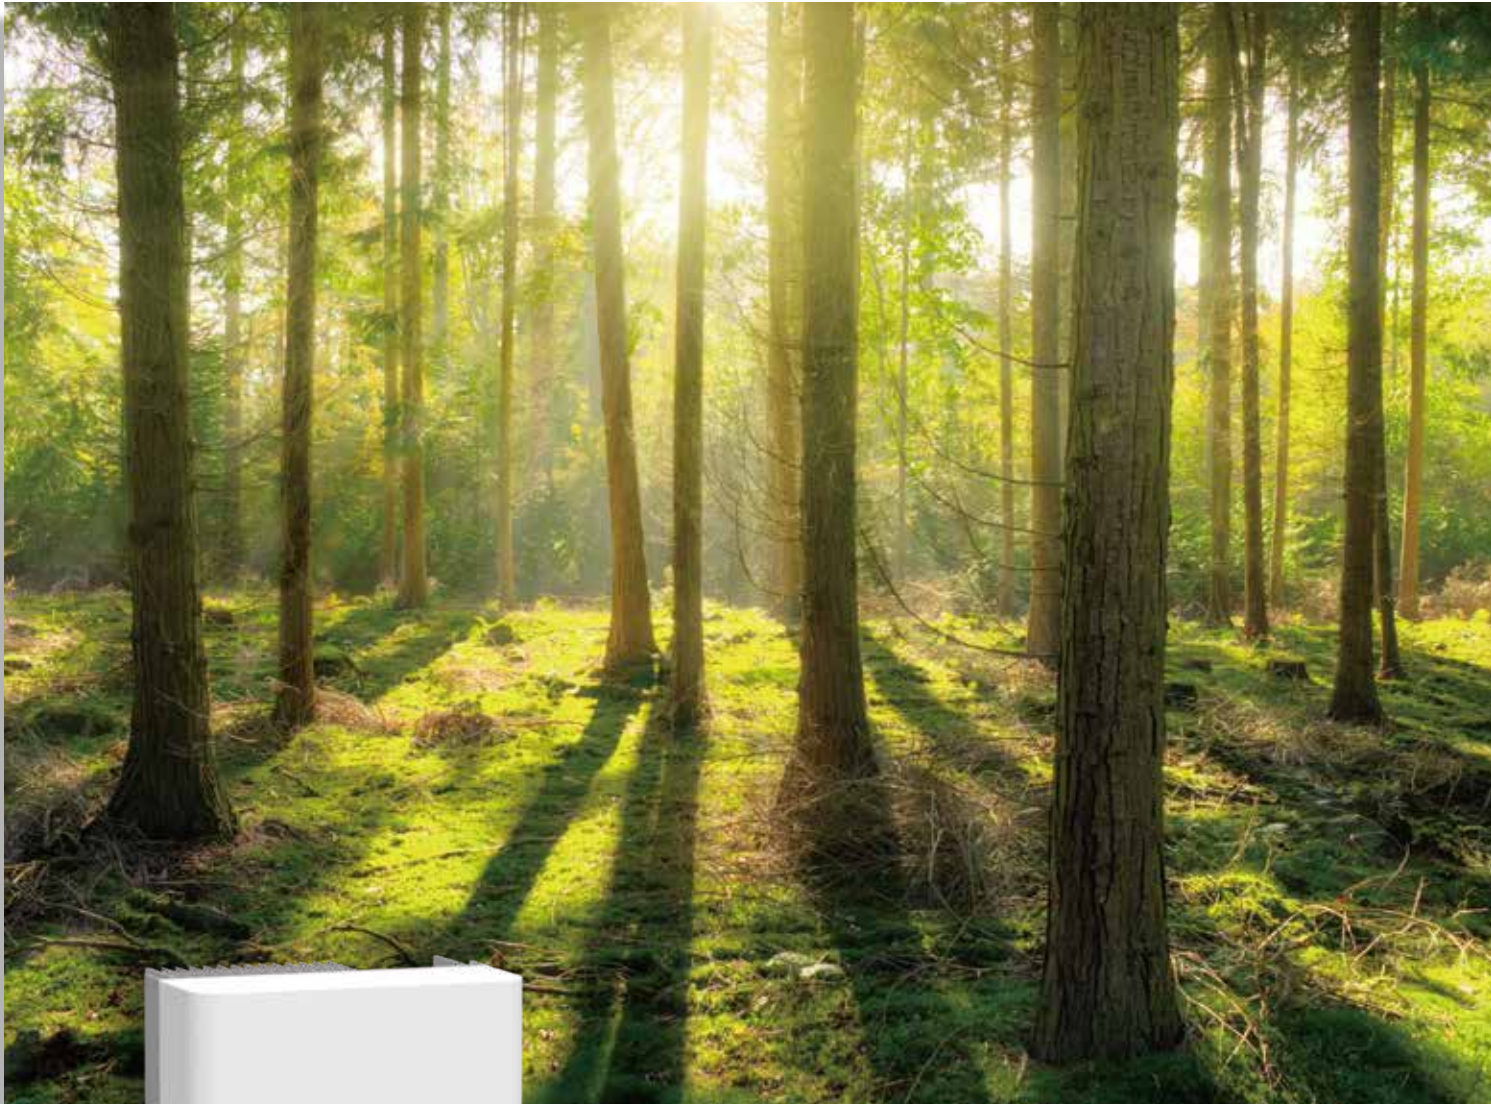

-  2 MPP trackers, Max. efficiency up to 98.6%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-30K-G04		SUN-33K-G04		SUN-36K-G04	
PV String Input Data						
Max. PV Input Power (kW)	39		42.9		46.8	
Max. PV Input Voltage (V)	1000					
Start-up Voltage (V)	200					
MPPT Voltage Range (V)	200-850					
Rated PV Input Voltage (V)	600					
Max. Operating PV Input Current (A)	(40+40)					
Max. Input Short Circuit Current (A)	60+60					
No. of MPPT Trackers/No. of Strings per MPPT Tracker	2/3+3					
AC Output Data						
Rated AC Output Active Power(kW)	30		33		36	
Max. AC Output Apparent Power(kVA)	33		36.3		39.6	
Rated AC Output current (A)	45.5/43.5		50/47.8		54.5/52.2	
Max. AC Output Current(A)	50/47.9		55/52.6		60/57.4	
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un					
Grid Connection Form	3L/N/PE					
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65					
Power Factor Adjustment Range	0.8 leading to 0.8 lagging					
Total Current Harmonic Distortion THDi	<3%					
DC Injection Current	<0.5%In					
Efficiency						
Max. Efficiency	98.6%					
Euro Efficiency	98.1%					
MPPT Efficiency	>99%					
Equipment Protection						
DC Polarity Reverse Connection Protection	Yes					
AC Output Overcurrent Protection	Yes					
AC Output Overvoltage Protection	Yes					
AC Output Short Circuit Protection	Yes					
Thermal Protection	Yes					
DC Terminal Insulation Impedance Monitoring	Yes					
DC Component Monitoring	Yes					
Ground Fault Current Monitoring	Yes					
Power Network Monitoring	Yes					
Island Protection Monitoring	Yes					
Earth Fault Detection	Yes					
Overvoltage Load Drop Protection	Yes					
Residual Current (RCD) Detection	Yes					
Surge Protection Level	TYPE II(DC), TYPE III(AC)					
Interface						
Communication Interface	RS485/RS232 /WiFi/LAN					
General Data						
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating					
Permissible Ambient Humidity	0-100%					
Permissible Altitude (m)	2000m					
Noise (dB)	≤ 50 dB(A)					
Ingress Protection(IP) Rating	IP 65					
Inverter Topology	Non-Isolated					
Over Voltage Category	OVC II(DC), OVC III(AC)					
Cabinet Size (mm)	362W×577H×215D (Excluding Connectors and Brackets)					
Weight (kg)	23					
Warranty	12 Years					
Type of Cooling	Natural Cooling					
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105					
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					

Note Possible to connect max 20A per string so to use only 2 strings per MPPT to arrive at max 40A per MPPT

Three Phase String Inverter

SUN-40/50K-G03



-  Max. 4 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-40K-G03		SUN-50K-G03	
PV String Input Data				
Max. PV Input Power (kW)	52		65	
Max. PV Input Voltage (V)	1100			
Start-up Voltage (V)	200			
MPPT Voltage Range (V)	200-1000			
Rated PV Input Voltage (V)	600			
Max. Operating PV Input Current (A)	(40+40+40)		(40+40+40+40)	
Max. Input Short Circuit Current (A)	60+60+60		60+60+60+60	
No. of MPPT Trackers/No. of Strings per MPPT Tracker	3/3+3+3		4/3+3+3+3	
AC Output Data				
Rated AC Output Active Power(kW)	40		50	
Max. AC Output Apparent Power(kVA)	44		55	
Rated AC Output current (A)	60.6/58		75.8/72.5	
Max. AC Output Current(A)	66.7/63.8		83.3/79.7	
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un			
Grid Connection Form	3L/N/PE			
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65			
Power Factor Adjustment Range	0.8 leading to 0.8 lagging			
Total Current Harmonic Distortion THDi	<3%			
DC Injection Current	<0.5%In			
Efficiency				
Max. Efficiency	98.7%			
Euro Efficiency	98.1%			
MPPT Efficiency	>99%			
Equipment Protection				
DC Polarity Reverse Connection Protection	Yes			
AC Output Overcurrent Protection	Yes			
AC Output Overvoltage Protection	Yes			
AC Output Short Circuit Protection	Yes			
Thermal Protection	Yes			
DC Terminal Insulation Impedance Monitoring	Yes			
DC Component Monitoring	Yes			
Ground Fault Current Monitoring	Yes			
Power Network Monitoring	Yes			
Island Protection Monitoring	Yes			
Earth Fault Detection	Yes			
Overvoltage Load Drop Protection	Yes			
Residual Current (RCD) Detection	Yes			
Surge Protection Level	TYPE II(DC), TYPE III(AC)			
Interface				
Communication Interface	RS485/RS232 /WiFi/LAN			
General Data				
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating			
Permissible Ambient Humidity	0-100%			
Permissible Altitude (m)	4000m			
Noise (dB)	≤ 50 dB(A)			
Ingress Protection(IP) Rating	IP 65			
Inverter Topology	Non-Isolated			
Over Voltage Category	OVC II(DC), OVC III(AC)			
Cabinet Size (mm)	434W×570H×243D (Excluding Connectors and Brackets)			
Weight (kg)	37.1			
Warranty	12 Years			
Type of Cooling	Natural Cooling			
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105			
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

Note Possible to connect max 20A per string so to use only 2 strings per MPPT to arrive at max 40A per MPPT

Three Phase String Inverter

SUN-60/70/75/80K-G03



-  4 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD

Technical Data

Model	SUN-60K-G03		SUN-70K-G03		SUN-75K-G03		SUN-80K-G03	
PV String Input Data								
Max. PV Input Power (kW)	90		105		112.5		120	
Max. PV Input Voltage (V)	1100							
Start-up Voltage (V)	200							
MPPT Voltage Range (V)	200-850							
Rated PV Input Voltage (V)	600							
Max. Operating PV Input Current (A)	(40+40+40+40)							
Max. Input Short Circuit Current (A)	60+60+60+60							
No. of MPPT Trackers/ No. of Strings per MPPT	4/3+3+3+3		4/4+4+4+4					
AC Output Data								
Rated AC Output Active Power(kW)	60		70		75		80	
Max. AC Output Apparent Power(kVA)	66		77		82.5		88	
Rated AC Output current (A)	90.9/87		106.1/101.5		113.6/108.7		121.2/115.9	
Max. AC Output Current(A)	100/95.7		116.7/111.6		125/119.6		133.3/127.5	
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un							
Grid Connection Form	3L/N/PE							
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65							
Power Factor Adjustment Range	0.8 leading to 0.8 lagging							
Total Current Harmonic Distortion THDi	<3%							
DC Injection Current	<0.5%In							
Efficiency								
Max. Efficiency	98.6%		98.7%					
Euro Efficiency	98.0%		98.1%					
MPPT Efficiency	>99%							
Equipment Protection								
DC Polarity Reverse Connection Protection	Yes							
AC Output Overcurrent Protection	Yes							
AC Output Overvoltage Protection	Yes							
AC Output Short Circuit Protection	Yes							
Thermal Protection	Yes							
DC Terminal Insulation Impedance Monitoring	Yes							
DC Component Monitoring	Yes							
Ground Fault Current Monitoring	Yes							
Power Network Monitoring	Yes							
Island Protection Monitoring	Yes							
Earth Fault Detection	Yes							
Overvoltage Load Drop Protection	Yes							
Residual Current (RCD) Detection	Yes							
Surge Protection Level	TYPE II(DC), TYPE III(AC)							
Interface								
Communication Interface	RS485/RS232 /WiFi/LAN							
General Data								
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating							
Permissible Ambient Humidity	0-100%							
Permissible Altitude (m)	2000m							
Noise (dB)	≤ 50 dB(A)		≤ 55 dB(A)					
Ingress Protection(IP) Rating	IP 65							
Inverter Topology	Non-Isolated							
Over Voltage Category	OVC II(DC), OVC III(AC)							
Cabinet Size (mm)	700W×575H×297D (Excluding Connectors and Brackets)							
Weight (kg)	60							
Warranty	12 Years							
Type of Cooling	Natural Cooling							
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105							
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2							

Note Possible to connect max 20A per string so to use only 2 strings per MPPT to arrive at max 40A per MPPT

Three Phase String Inverter

SUN-90/100/110K-G03



-  Max. 6 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD

Technical Data

Model	SUN-90K-G03		SUN-100K-G03	SUN-110K-G03
PV String Input Data				
Max. PV Input Power (kW)	135	150	150	
Max. PV Input Voltage (V)	1100			
Start-up Voltage (V)	200			
MPPT Voltage Range (V)	200-850			
Rated PV Input Voltage (V)	600			
Max. Operating PV Input Current (A)	(40+40+40+40+40+40)			
Max. Input Short Circuit Current (A)	60+60+60+60+60+60			
No. of MPPT Trackers/No. of Strings per MPPT Tracker	6/4+4+4+4+4+4			
AC output Data				
Rated AC Output Active Power(kW)	90	100	110	
Max. AC Output Apparent Power(kVA)	99	110	121	
Rated AC Output current (A)	136.4/130.4	151.5/144.9	166.7/159.4	
Max. AC Output Current(A)	150/143.5	166.7/159.4	183.3/175.4	
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un			
Grid Connection Form	3L/N/PE			
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65			
Power Factor Adjustment Range	0.8 leading to 0.8 lagging			
Total Current Harmonic Distortion THDi	<3%			
DC Injection Current	<0.5%In			
Efficiency				
Max. Efficiency	98.8%			
Euro Efficiency	98.2%			
MPPT Efficiency	>99%			
Equipment Protection				
DC Polarity Reverse Connection Protection	Yes			
AC Output Overcurrent Protection	Yes			
AC Output Overvoltage Protection	Yes			
AC Output Short Circuit Protection	Yes			
Thermal Protection	Yes			
DC Terminal Insulation Impedance Monitoring	Yes			
DC Component Monitoring	Yes			
Ground Fault Current Monitoring	Yes			
Power Network Monitoring	Yes			
Island Protection Monitoring	Yes			
Earth Fault Detection	Yes			
Overvoltage Load Drop Protection	Yes			
Residual Current (RCD) Detection	Yes			
Surge Protection Level	TYPE II(DC), TYPE III(AC)			
Interface				
Communication Interface	RS485/RS232 /WiFi/LAN			
General Data				
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating			
Permissible Ambient Humidity	0-100%			
Permissible Altitude (m)	4000m			
Noise (dB)	≤ 55 dB(A)			
Ingress Protection(IP) Rating	IP 65			
Inverter Topology	Non-Isolated			
Over Voltage Category	OVC II(DC), OVC III(AC)			
Cabinet Size (mm)	826W×516H×312.7D (Excluding Connectors and Brackets)			
Weight (kg)	81			
Warranty	12 Years			
Type of Cooling	Natural Cooling			
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105			
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

Note Possible to connect max 20A per string so to use only 2 strings per MPPT to arrive at max 40A per MPPT

Three Phase String Inverter

SUN-120/125/130/135/136K-G01P3-EU-AM8



-  8 MPP trackers,
Max. efficiency up to 98.8%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD

Technical Data

Model	SUN-120K-G01P3 -EU-AM8	SUN-125K-G01P3 -EU-AM8	SUN-130K-G01P3 -EU-AM8	SUN-135K-G01P3 -EU-AM8	SUN-136K-G01P3 -EU-AM8
PV String Input Data					
Max. PV Input Power (kW)	180	187.5	195	202.5	204
Max. PV Input Voltage (V)	1100				
Start-up Voltage (V)	200				
MPPT Voltage Range (V)	200-1100				
Rated PV Input Voltage (V)	600				
Max. Operating PV Input Current (A)	(40+40+40+40+40+40+40+40)				
Max. Input Short Circuit Current (A)	60+60+60+60+60+60+60+60				
No. of MPPT Trackers/ No. of Strings per MPPT	8/4+4+4+4+4+4+4+4				
AC Output Data					
Rated AC Output Active Power(kW)	120	125	130	135	136
Max. AC Output Apparent Power(kVA)	132	135	135	135	136
Rated AC Output current (A)	181.9/174	189.4/181.2	197/188.5	204.6/195.7	206.1/197.2
Max. AC Output Current(A)	200/191.4	204.6/195.7	204.6/195.7	204.6/195.7	206.1/197.2
Rated Output voltage/range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Grid Connection Form	3L/N/PE				
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Total Current Harmonic Distortion THDi	<3%				
DC Injection Current	<0.5%In				
Efficiency					
Max. Efficiency	98.8%				
Euro Efficiency	98.2%				
MPPT Efficiency	>99%				
Equipment Protection					
DC Polarity Reverse Connection Protection	Yes				
AC Output Overcurrent Protection	Yes				
AC Output Overvoltage Protection	Yes				
AC Output Short Circuit Protection	Yes				
Thermal Protection	Yes				
DC Terminal Insulation Impedance Monitoring	Yes				
DC Component Monitoring	Yes				
Ground Fault Current Monitoring	Yes				
Power Network Monitoring	Yes				
Island Protection Monitoring	Yes				
Earth Fault Detection	Yes				
Overvoltage Load Drop Protection	Yes				
Residual Current (RCD) Detection	Yes				
Surge Protection Level	TYPE II(DC), TYPE III(AC)				
Interface					
Communication Interface	RS485/RS232 /WiFi/LAN				
General Data					
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude (m)	4000m				
Noise (dB)	≤ 65 dB(A)				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (mm)	1006W×516H×325.5D (Excluding Connectors and Brackets)				
Weight (kg)	103				
Warranty	12 Years				
Type of Cooling	Natural Cooling				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, G99, VDE-AR-N 4105				
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Note Possible to connect max 20A per string so to use only 2 strings per MPPT to arrive at max 40A per MPPT

Hybrid Inverter

SUN-3.6/5K-SG03LP1-EU



-  Colorful touch LCD, IP65 protection degree
-  AC couple to retrofit existing solar system
-  Max. 16pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
-  Max. charging/discharging current of 120A
-  6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Technical Data

Model	SUN-3.6K-SG03LP1-EU		SUN-5K-SG03LP1-EU
Battery Input Data			
Battery Type	Lead-acid or Lithium-ion		
Battery Voltage Range (V)	40-60		
Max. Charging Current (A)	90	120	
Max. Discharging Current (A)	90	120	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
Number of Battery Input	1		
PV String Input Data			
Max. DC Input Power (W)	4680	6500	
Rated PV Input Voltage (V)	500		
Start-up Voltage (V)	125		
MPPT Voltage Range (V)	150-425		
Rated DC Input Voltage(V)	370		
Max. Operating PV Input Current (A)	13+13		
Max. Input Short-Circuit Current (A)	17+17		
No.of MPP Trackers/ No.of Strings per MPP Tracker	2/1+1		
AC Output Data			
Rated AC Output Active Power (W)	3600	5000	
Max AC Output Active Power (W)	3960	5500	
AC Output Rated Current (A)	16.4/15.7	22.7/21.7	
Max. AC Output Current (A)	18/17.2	25/23.9	
Max. Continuous AC Passthrough (A)	35		
Peak Power (off grid)	2 time of rated power, 10 S		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un		
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz		
Grid Connection Form	L+N+PE		
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)		
DC Current Injection	<0.5% In		
Efficiency			
Max. Efficiency	97.60%		
Euro Efficiency	96.50%		
MPPT Efficiency	99.90%		
Protection			
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level		
Over Voltage Category	TYPE II(DC), TYPE II(AC)		
Interface			
Communication Interface	WIFI, RS485, CAN		
General Data			
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating		
Permissible Ambient Humidity	0-100%		
Permissible Altitude	2000m		
Noise (dB)	≤30 dB		
Inverter Topology	Non-Isolated		
Weight (kg)	25		
Size (mm)	330W x 580H x232D (Excluding connectors and brackets)		
Protection Degree	IP65		
Type of Cooling	Intelligent Air Cooling		
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy		
Grid Regulation	IEC 61727,IEC 62116,CEI 0-21,EN 50549, NRS 097,RD 140,UNE 217002, OVE-Richtlinie R25,G99,VDE-AR-N 4105		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		

Hybrid Inverter

SUN-6K-SG05LP1-EU



-  Colorful touch LCD, IP65 protection degree
-  AC couple to retrofit existing solar system
-  Max. 16 pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
-  Max. charging/discharging current of 190A
-  6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Technical Data

Model	SUN-6K-SG05LP1-EU
Battery Input Data	
Battery Type	Lead-acid or Lithium-ion
Battery Voltage Range (V)	40-60
Max. Charging Current (A)	135
Max. Discharging Current (A)	135
Charging Strategy for Li-Ion Battery	Self-adaption to BMS
Number of Battery Input	1
PV String Input Data	
Max. DC Input Power (W)	7800
Rated PV Input Voltage (V)	500
Start-up Voltage (V)	125
MPPT Voltage Range (V)	150-425
Rated DC Input Voltage(V)	370
Max. Operating PV Input Current (A)	13+13
Max. Input Short-Circuit Current (A)	17+17
No.of MPP Trackers/ No.of Strings per MPP Tracker	2/1+1
AC Output Data	
Rated AC Output Active Power (W)	6000
Max AC Output Active Power (W)	6600
AC Output Rated Current (A)	27.3/26.1
Max. AC Output Current (A)	30/28.7
Max. Continuous AC Passthrough (A)	40
Peak Power (off grid)	2 time of rated power, 10 S
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Rated Input/Output Voltage/Range (V)	220/ 230 0.85Un-1.1Un
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz
Grid Connection Form	L+N+PE
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)
DC Current Injection	<0.5% In
Efficiency	
Max. Efficiency	97.60%
Euro Efficiency	96.50%
MPPT Efficiency	99.90%
Protection	
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level
Over Voltage Category	TYPE II(DC), TYPE II(AC)
Interface	
Communication Interface	WIFI, RS485, CAN
General Data	
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating
Permissible Ambient Humidity	0-100%
Permissible Altitude	2000m
Noise (dB)	≤30 dB
Inverter Topology	Non-Isolated
Weight (kg)	24
Cabinet size (mm)	330W x 580H x232D (Excluding connectors and brackets)
Protection Degree	IP65
Type of Cooling	Intelligent Air Cooling
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy
Grid Regulation	IEC 61727,IEC 62116,CEI 0-21,EN 50549, NRS 097,RD 140,UNE 217002, OVE-Richtlinie R25,G99,VDE-AR-N 4105
Safety EMC / Standard	IEC/EN 61000-6- 1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

Hybrid Inverter

SUN-8K-SG01LP1-EU





-  Colorful touch LCD, IP65 protection degree
-  AC couple to retrofit existing solar system
-  Max. 16pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
-  Max. charging/discharging current of 190A
-  6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Technical Data

Model		SUN-8K-SG01LP1-EU
Battery Input Data		
Battery Type	Lead-acid or Lithium-ion	
Battery Voltage Range (V)	40-60	
Max. Charging Current (A)	190	
Max. Discharging Current (A)	190	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS	
Number of Battery Input	1	
PV String Input Data		
Max. DC Input Power (W)	10400	
Rated PV Input Voltage (V)	500	
Start-up Voltage (V)	125	
MPPT Voltage Range (V)	150-425	
Rated DC Input Voltage(V)	370	
Max. Operating PV Input Current (A)	26+26	
Max. Input Short-Circuit Current (A)	44+44	
No.of MPP Trackers/ No.of Strings per MPP Tracker	2/2+2	
AC Output Data		
Rated AC Output Active Power (W)	8000	
Max AC Output Active Power (W)	8800	
AC Output Rated Current (A)	36.4/34.8	
Max. AC Output Current (A)	40/38.3	
Max. Continuous AC Passthrough (A)	50	
Peak Power (off grid)	2 time of rated power, 10 S	
Power Factor Adjustment Range	0.8 leading to 0.8 lagging	
Rated Input/Output Voltage/Range (V)	220/ 230 0.85Un-1.1Un	
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz	
Grid Connection Form	L+N+PE	
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)	
DC Current Injection	<0.5% In	
Efficiency		
Max. Efficiency	97.60%	
Euro Efficiency	96.50%	
MPPT Efficiency	99.90%	
Protection		
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level	
Over Voltage Category	TYPE II(DC), TYPE II(AC)	
Interface		
Communication Interface	WIFI, RS485, CAN	
General Data		
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating	
Permissible Ambient Humidity	0-100%	
Permissible Altitude	2000m	
Noise (dB)	≤30 dB	
Inverter Topology	Non-Isolated	
Weight (kg)	32	
Cabinet size (mm)	420W x 670H x233D (Excluding connectors and brackets)	
Protection Degree	IP65	
Type of Cooling	Intelligent Air Cooling	
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy	
Grid Regulation	IEC 61727,IEC 62116,CEI 0-21,EN 50549, NRS 097,RD 140,UNE 217002, OVE-Richtlinie R25,G99,VDE-AR-N 4105	
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2	

Hybrid Inverter

SUN-12/14/16K-SG01LP1-EU

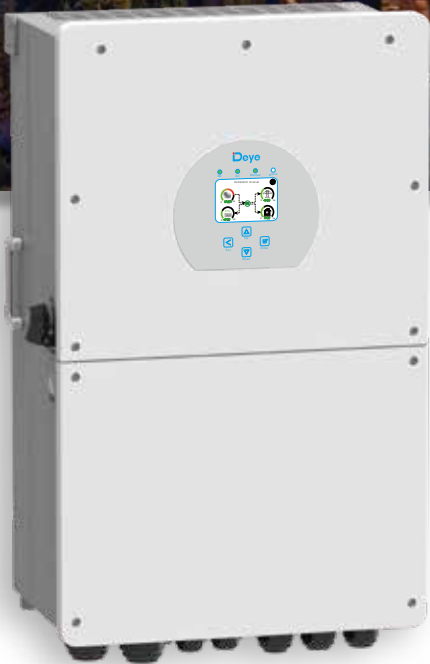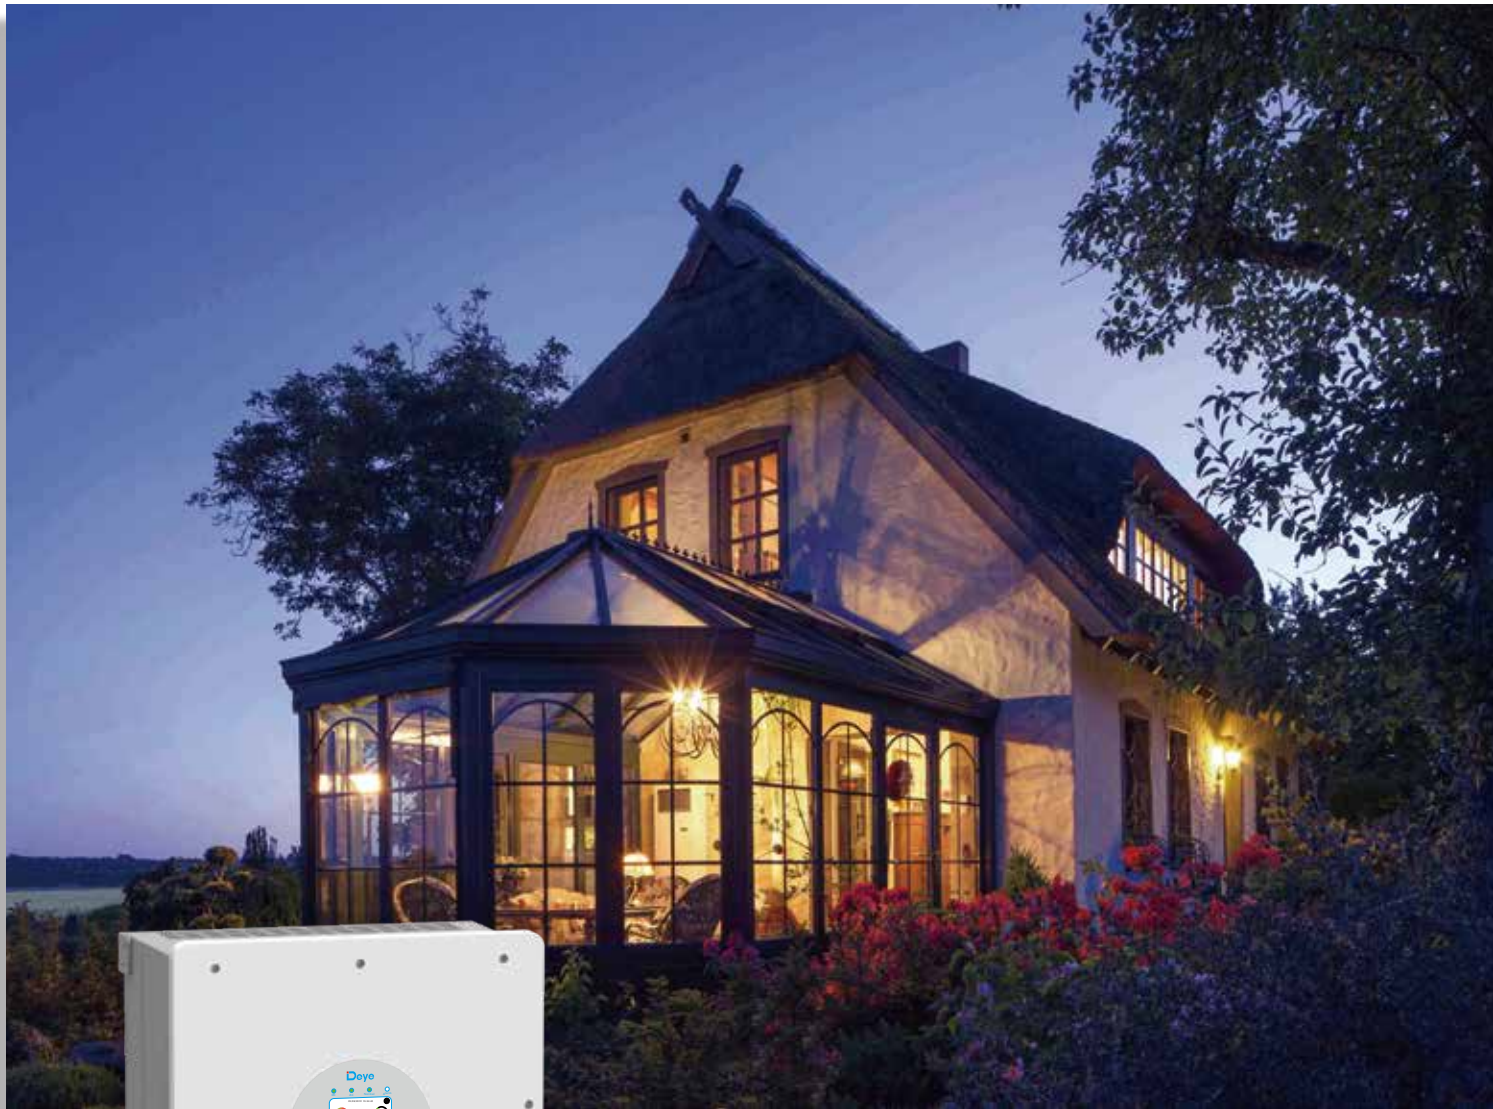

- Colorful touch LCD, IP65 protection degree
- AC couple to retrofit existing solar system
- Max. 16pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
- Max. charging/discharging current of 290A
- 6 time periods for battery charging/discharging
- Support storing energy from diesel generator

Technical Data

Model	SUN-12K-SG01LP1-EU		SUN-14K-SG01LP1-EU		SUN-16K-SG01LP1-EU	
Battery Input Data						
Battery Type	Lead-acid or Lithium-ion					
Battery Voltage Range (V)	40-60					
Max. Charging Current (A)	220	250		290		
Max. Discharging Current (A)	220	250		290		
Charging Strategy for Li-Ion Battery	Self-adaption to BMS					
Number of Battery Input	1					
PV String Input Data						
Max. DC Input Power (W)	15600	18200		20800		
Rated PV Input Voltage (V)	500					
Start-up Voltage (V)	125					
MPPT Voltage Range (V)	150-425					
Rated DC Input Voltage(V)	370					
Max. Operating PV Input Current (A)	26+26+26					
Max. Input Short-Circuit Current (A)	44+44+44					
No.of MPP Trackers/ No.of Strings per MPP Tracker	3/2+2+2					
AC Output Data						
Rated AC Output Active Power (W)	12000	14000		16000		
Max AC Output Active Power (W)	13200	15400		17600		
AC Output Rated Current (A)	54.5/52.2	63.6/60.9		72.7/69.6		
Max. AC Output Current (A)	60/57.4	70/67		80/76.5		
Max. Continuous AC Passthrough (A)	100					
Peak Power (off grid)	2 time of rated power, 10 S					
Power Factor Adjustment Range	0.8 leading to 0.8 lagging					
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un					
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz					
Grid Connection Form	L+N+PE					
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)					
DC Current Injection	<0.5% In					
Efficiency						
Max. Efficiency	97.60%					
Euro Efficiency	96.50%					
MPPT Efficiency	99.90%					
Protection						
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level					
Over Voltage Category	TYPE II(DC), TYPE II(AC)					
Interface						
Communication Interface	WIFI, RS485, CAN					
General Data						
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating					
Permissible Ambient Humidity	0-100%					
Permissible Altitude	2000m					
Noise (dB)	≤50 dB					
Inverter Topology	Non-Isolated					
Weight (kg)	52					
Cabinet size (mm)	464W×763H×282D (Excluding connectors and brackets)					
Protection Degree	IP65					
Type of Cooling	Intelligent Air Cooling					
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy					
Grid Regulation	IEC 61727,IEC 62116,CEI 0-21,EN 50549, NRS 097,RD 140,UNE 217002, OVE-Richtlinie R25,G99,VDE-AR-N 4105					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					

Three Phase Hybrid Inverter

SUN-5/6/8/10/12K-SG04LP3-EU



- 100

100% unbalanced output, each phase Max. output up to 50% rated power
- AC couple to retrofit existing solar system
- 16

Max. 16pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
- 240

Max. charging/discharging current of 240A
- 48

48V low voltage battery, transformer isolation design
- 6

6 time periods for battery charging/discharging
- Support storing energy from diesel generator

Technical Data

Model	SUN-5K -SG04LP3-EU	SUN-6K -SG04LP3-EU	SUN-8K -SG04LP3-EU	SUN-10K -SG04LP3-EU	SUN-12K -SG04LP3-EU
Battery Input Data					
Battery Type	Lead-acid or Lithium-ion				
Battery Voltage Range (V)	40-60				
Max. Charging Current (A)	120	150	190	210	240
Max. Discharging Current (A)	120	150	190	210	240
Charging Strategy for Li-ion Battery	Self-adaption to BMS				
Number of Battery Input	1				
PV String Input Data					
Max. DC Input Power (W)	6500	7800	10400	13000	15600
Max. DC Input Voltage (V)	800				
Start-up Voltage (V)	160				
MPPT Voltage Range (V)	350-650				
Rated DC Input Voltage (V)	550				
Max. Operating PV Input Current (A)	13+13			26+13	
Max. Input Short-Circuit Current (A)	17+17			34+17	
No.of MPPT Trackers/ No.of String Per MPPT Tracker	2/1+1			2/2+1	
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	5000	6000	8000	10000	12000
Max. AC Input/Output Apparent Power (VA) Rated AC Input/Output Current (A)	5500 7.6/7.2	6600 9.1/8.7	8800 12.1/11.6	11000 15.2/14.5	13200 18.2/17.4
Max. AC Input/Output Current (A)	8.4/8	10/9.6	13.4/12.8	16.7/15.9	20/19.1
Max. Three-phase Unbalanced Output Current (A)	11.4/10.9	13.6/13	18.2/17.4	22.7/21.7	27.3/26.1
Max. Continuous AC Passthrough (grid to load) (A)	45				
Peak Power (off-grid) (W)	2 times of rated power, 10s				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Component of Grid	<0.5% In				
Efficiency					
Max. Efficiency	97.60%				
Euro Efficiency	97.0%				
MPPT Efficiency	>99%				
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II(DC), TYPE II(AC)				
Interface					
Communication Interface	WIFI, RS485, CAN				
General Data					
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	2000m				
Noise	≤55 dB(A)				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet size (W H D) mm	422×658×254 (Excluding Connectors and Brackets)				
Weight (kg)	38				
Type of Cooling	Intelligent Air Cooling				
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Three Phase Hybrid Inverter

SUN-5/6/8/10/12/15/20/25K-SG01HP3-EU-AM2



- 100

100% unbalanced output, each phase
- AC couple to retrofit existing solar system
- 16

Max. 16pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
- 50

Max. charging/discharging current of 50A
- H

High voltage battery, higher efficiency
- 6

6 time periods for battery charging/ discharging
- Support storing energy from diesel generator

Technical Data

Model	SUN-5K-SG01 HP3-EU-AM2	SUN-6K-SG01 HP3-EU-AM2	SUN-8K-SG01 HP3-EU-AM2	SUN-10K-SG01 HP3-EU-AM2	SUN-12K-SG01 HP3-EU-AM2	SUN-15K-SG01 HP3-EU-AM2	SUN-20K-SG01 HP3-EU-AM2	SUN-25K-SG01 HP3-EU-AM2
Battery Input Data								
Battery Type	Lead-acid or Lithium-ion							
Battery Voltage Range (V)	160-700							
Max. Charging Current (A)	30	37						50
Max. Discharging Current (A)	30	37						50
Charging Strategy for Li-ion Battery	Self-adaption to BMS							
Number of Battery Input	1							
PV String Input Data								
Max. DC Input Power (W)	6500	7800	10400	13000	15600	19500	26000	32500
Max. DC Input Voltage (V)	1000							
Start-up Voltage (V)	180							
MPPT Voltage Range (V)	150-850							
Rated DC Input Voltage (V)	600							700
Max. Operating PV Input Current (A)	20+20				26+20		26+26	26+26
Max. Input Short-Circuit Current (A)	30+30				39+30		39+39	39+39
No. of MPPT Trackers/ No. of String Per MPPT Tracker	2/1+1				2/2+1		2/2+2	2/2+2
AC Input/Output Data								
Rated AC Input/Output Active Power (W)	5000	6000	8000	10000	12000	15000	20000	25000
Max. AC Input/Output Apparent Power (VA)	5500	6600	8800	11000	13200	16500	22000	26000
Rated AC Input/Output Current (A)	7.6/7.3	9.1/8.7	12.2/11.6	15.2/14.5	18.2/17.4	22.8/21.8	30.4/29	37.9/36.3
Max. AC Input/Output Current (A)	8.4/8	10/9.6	13.4/12.8	16.7/16	20/19.2	25/24	33.4/31.9	41.7/37.7
Max. Three-phase Unbalanced Output Current (A)	13	13	18	22	25	30	35	41.7
Max. Continuous AC Passthrough (grid to load) (A)	40				80			
Peak Power (off-grid) (W)	2 times of rated power, 10s							
Power Factor Adjustment Range	0.8 leading to 0.8 lagging							
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un							
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz				60Hz/55Hz-65Hz			
Grid Connection Form	3L+N+PE							
Total Current Harmonic Distortion THDi	<3% (of nominal power)							
DC Component of Grid	<0.5% In							
Efficiency								
Max. Efficiency	97.60%							
Euro Efficiency	97.0%							
MPPT Efficiency	>99%							
Equipment Protection								
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level							
Surge Protection Level	TYPE II(DC), TYPE II(AC)							
Interface								
Communication Interface	WIFI, RS485, CAN							
General Data								
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating							
Permissible Ambient Humidity	0-100%							
Permissible Altitude	2000m							
Noise	≤55 dB(A)							
Ingress Protection(IP) Rating	IP 65							
Inverter Topology	Non-Isolated							
Over Voltage Category	OVC II(DC), OVC III(AC)							
Cabinet size (mm)	408W×638H×237D (Excluding Connectors and Brackets)							
Weight (kg)	30.5							
Type of Cooling	Natural Cooling	Intelligent Air Cooling						
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy							
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105							
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2							

Three Phase Hybrid Inverter

SUN-29.9/30/35K-SG01HP3-EU-BM3

SUN-40/50K-SG01HP3-EU-BM4



-  100% unbalanced output, each phase
-  AC couple to retrofit existing solar system
-  Max. 10 pcs parallel for on-grid and off-grid operation Support multiple batteries parallel
-  Max. charging/discharging current of 100A
-  High voltage battery, higher efficiency
-  6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Technical Data

Model	SUN-29.9K-SG01HP3 -EU-BM3	SUN-30K-SG01HP3 -EU-BM3	SUN-35K-SG01HP3 -EU-BM3	SUN-40K-SG01HP3 -EU-BM4	SUN-50K-SG01HP3 -EU-BM4
Battery Input Data					
Battery Type	Lead-acid or Lithium-ion				
Battery Voltage Range (V)	160-700				
Max. Charging Current (A)	50+50				
Max. Discharging Current (A)	50+50				
Charging Strategy for Li-ion Battery	Self-adaption to BMS				
Number of Battery Input	2				
PV String Input Data					
Max. DC Input Power (W)	38870	39000	45500	52000	65000
Max. DC Input Voltage (V)	1000				
Start-up Voltage (V)	180				
MPPT Voltage Range (V)	150-850				
Rated DC Input Voltage (V)	600				
Max. Operating PV Input Current (A)	36+36+36	36+36+36	36+36+36	36+36+36+36	
Max. Input Short-Circuit Current (A)	55+55+55	55+55+55	55+55+55	55+55+55+55	
No.of MPPT Trackers/ No.of String Per MPPT Tracker	3/2+2+2			4/2+2+2+2	
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	29900	30000	35000	40000	50000
Max. AC Input/Output Apparent Power (VA) Rated AC Input/Output Current (A)	29900 45.4/43.4	33000 45.5/43.5	38500 53.1/50.8	44000 60.7/58	55000 75.8/72.5
Max. AC Input/Output Current (A)	45.4/43.4	50/47.8	58.4/55.8	66.7/63.8	83.4/79.7
Max. Three-phase Unbalanced Output Current (A)	60	60	60	70	83.3
Max. Continuous AC Passthrough (grid to load) (A)	200				
Peak Power (off-grid) (W)	2 times of rated power, 10s				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Component of Grid	<0.5% In				
Efficiency					
Max. Efficiency	97.60%				
Euro Efficiency	97.0%				
MPPT Efficiency	>99%				
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II(DC), TYPE II(AC)				
Interface					
Communication Interface	WIFI, RS485, CAN				
General Data					
Operating Temperature Range (°C)	-40 to +60°C, >45°C derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	2000m				
Noise	≤65 dB(A)				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet size (mm)	527W×894H×294D (Excluding Connectors and Brackets)				
Weight (kg)	80				
Type of Cooling	Intelligent Air Cooling				
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Microinverter

SUN-M30/40/50G4-EU-Q0



- ✓ 1 MPP tracker, module level monitoring
- ✓ IP67 protection degree
- ✓ WIFI communication
- ✓ Rapid shutdown function
- ✓ Easy installation, suitable for quick-plug balcony PV system
- ✓ <100ms AC fast discharge, compliant with new required standard DIN VDE 0620-1 (<200ms) to protect human safety
- ✓ Complete NS protection with self-check function
- ✓ External relay advantage with low temperature, long life, easier maintenance
- ✓ 25 years design lifetime and 15 years warranty
- ✓ With integrate WIFI

Technical Data

Model	SUN-M30G4-EU-Q0		SUN-M40G4-EU-Q0	SUN-M50G4-EU-Q0
PV String Input Data				
Max. PV Input Power (W)	210-420(1 Pieces)	210-560(1 Pieces)	210-700(1 Pieces)	
Max. PV Input Voltage (V)	60			
Start-up Voltage (V)	20			
MPPT Voltage Range (V)	25-55			
Rated PV Input Voltage (V)	42.5			
Max. Operating PV Input Current (A)	13			
Max. Input Short Circuit Current (A)	19.5			
No. of MPPT Trackers/ No. of Strings per MPPT	1/1			
AC Output Data				
Rated AC Output Active Power(W)	300	400	500	
Max.AC Output Apparent Power(VA)	300	400	500	
Rated AC Output current (A)	1.4/1.4	1.9/1.8	2.3/2.2	
Max.AC Output Current(A)	1.4/1.4	1.9/1.8	4.3/2.2	
Rated Output voltage/range (V)	220/230 0.85Un-1.1Un			
Grid Connection Form	L/N/PE			
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65			
Max. unit per branch	17	13	10	
Power Factor Adjustment Range	0.8 leading to 0.8 lagging			
Total Current Harmonic Distortion THDi	<3%			
DC Injection Current	<0.5%In			
Efficiency				
Max. Efficiency	96.5%			
Euro Efficiency	96.0%			
MPPT Efficiency	>99%			
Equipment Protection				
DC Polarity Reverse Connection Protection	Yes			
AC Output Overcurrent Protection	Yes			
AC Output Overvoltage Protection	Yes			
AC Output Short Circuit Protection	Yes			
Thermal Protection	Yes			
DC Terminal Insulation Impedance	Yes			
Monitoring Power Network Monitoring	Yes			
Island Protection Monitoring	Yes			
Earth Fault Detection	Yes			
Overvoltage Load Drop Protection	Yes			
Interface				
Communication Interface	WiFi			
General Data				
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating			
Permissible Ambient Humidity	0-100%			
Permissible Altitude (m)	2000m			
Noise (dB)	≤25 dB			
Ingress Protection(IP) Rating	IP 67			
Inverter Topology	Isolated			
Over Voltage Category	OVC II(DC), OVC III(AC)			
Cabinet Size (WxHxD mm)	248.9×147×38.8 (Excluding Connectors and Brackets)			
Weight (kg)	1.8			
Warranty	15 Years			
Type of Cooling	Natural Cooling			
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105			
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

Microinverter

SUN-M60/80/100G4-EU-Q0



- ✓ 2 MPP tracker, module level monitoring
- ✓ IP67 protection degree
- ✓ WIFI communication
- ✓ Rapid shutdown function
- ✓ Easy installation, suitable for quick-plug balcony PV system
- ✓ <100ms AC fast discharge, compliant with new required standard DIN VDE 0620-1 (<200ms) to protect human safety
- ✓ Complete NS protection with self-check function
- ✓ External relay advantage with low temperature, long life, easier maintenance
- ✓ 25 years design lifetime and 15 years warranty
- ✓ With integrate WIFI

Technical Data

Model	SUN-M60G4-EU-Q0		SUN-M80G4-EU-Q0	SUN-M100G4-EU-Q0
PV String Input Data				
Max. PV Input Power (W)	210-420(2 Pieces)	210-560(2 Pieces)	210-700(2 Pieces)	
Max. PV Input Voltage (V)	60			
Start-up Voltage (V)	20			
MPPT Voltage Range (V)	25-55			
Rated PV Input Voltage (V)	42.5			
Max. Operating PV Input Current (A)	13+13			
Max. Input Short Circuit Current (A)	19.5+19.5			
No. of MPPT Trackers/ No. of Strings per MPPT	2/1			
AC Output Data				
Rated AC Output Active Power(W)	600	800	1000	
Max.AC Output Apparent Power(VA)	600	800	1000	
Rated AC Output current (A)	2.8/2.7	3.7/3.5	4.6/4.4	
Max.AC Output Current(A)	2.8/2.7	3.7/3.5	4.6/4.4	
Rated Output voltage/range (V)	220/230 0.85Un-1.1Un			
Grid Connection Form	L/N/PE			
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65			
Max. unit per branch	8	6	5	
Power Factor Adjustment Range	0.8 leading to 0.8 lagging			
Total Current Harmonic Distortion THDi	<3%			
DC Injection Current	<0.5%In			
Efficiency				
Max. Efficiency	96.5%			
Euro Efficiency	96.0%			
MPPT Efficiency	>99			
Equipment Protection				
DC Polarity Reverse Connection Protection	Yes			
AC Output Overcurrent Protection	Yes			
AC Output Overvoltage Protection	Yes			
AC Output Short Circuit Protection	Yes			
Thermal Protection	Yes			
DC Terminal Insulation Impedance	Yes			
Monitoring Power Network Monitoring	Yes			
Island Protection Monitoring	Yes			
Earth Fault Detection	Yes			
Overvoltage Load Drop Protection	Yes			
Interface				
Communication Interface	WiFi			
General Data				
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating			
Permissible Ambient Humidity	0-100%			
Permissible Altitude (m)	2000m			
Noise (dB)	≤25 dB			
Ingress Protection(IP) Rating	IP 67			
Inverter Topology	Isolated			
Over Voltage Category	OVC II(DC), OVC III(AC)			
Cabinet Size (WxHxD mm)	280.5×190×40 (Excluding Connectors and Brackets)			
Weight (kg)	3			
Warranty	15 Years			
Type of Cooling	Natural Cooling			
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105			
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			

Microinverter

SUN-M130/160/180/200/220G4-EU-Q0



- 18

Max. DC input current of 18A, adapt to 700W PV module
- IP67 protection degree, 10 years warranty
- 4 MPP trackers, module level monitoring
- WIFI communication
- Rapid shutdown function

Technical Data

Model	SUN-M130G4 -EU-Q0	SUN-M160G4 -EU-Q0	SUN-M180G4 -EU-Q0	SUN-M200G4 -EU-Q0	SUN-M220G4 -EU-Q0
PV String Input Data					
Max. PV Input Power (W)	210-460W (4 Pieces)	210-560W (4 Pieces)	210-630W (4 Pieces)	210-700W (4 Pieces)	210-770W (4 Pieces)
Max. PV Input Voltage (V)	60				
Start-up Voltage (V)	20				
MPPT Voltage Range (V)	25-55				
Rated PV Input Voltage (V)	42.5				
Max. Operating PV Input Current (A)	27+27+27+27				
Max. Input Short Circuit Current (A)	18+18+18+18				
No. of MPPT Trackers/ No. of Strings per MPPT	4/1+1+1+1				
AC Output Data					
Rated AC Output Active Power(W)	1300	1600	1800	2000	2200
Max.AC Output Apparent Power(VA)	1300	1600	1800	2000	2200
Rated AC Output current (A)	6/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6
Max.AC Output Current(A)	6/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6
Rated Output voltage/range (V)	220/230 0.85Un-1.1Un				
Grid Connection Form	L/N/PE				
Rated Output Grid Frequency/range(Hz)	50/45-55, 60/55-65				
Max. unit per branch	5	4	3	3	3
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Total Current Harmonic Distortion THDi	<3%				
DC Injection Current	<0.5%In				
Efficiency					
Max. Efficiency	96.5%				
Euro Efficiency	96.0%				
MPPT Efficiency	>99				
Equipment Protection					
DC Polarity Reverse Connection Protection	Yes				
AC Output Overcurrent Protection	Yes				
AC Output Overvoltage Protection	Yes				
AC Output Short Circuit Protection	Yes				
Thermal Protection	Yes				
DC Terminal Insulation Impedance	Yes				
Monitoring Power Network Monitoring	Yes				
Island Protection Monitoring	Yes				
Earth Fault Detection	Yes				
Overvoltage Load Drop Protection	Yes				
Interface					
Communication Interface	WiFi				
General Data					
Operating Temperature Range (°C)	-25 to +65°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude (m)	2000m				
Noise (dB)	≤25 dB				
Ingress Protection(IP) Rating	IP 67				
Inverter Topology	Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (WxHxD mm)	311×250.5×36.5 (Excluding Connectors and Brackets)				
Weight (kg)	5.1				
Warranty	10 Years				
Type of Cooling	Natural Cooling				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				


Energy Meter



Technical Data

Model	CHNT DDSU666	CHNT DTSU666	EASTRON SDM 230 Modbus	EASTRON SDM 630-Modbus V2	EASTRON SDM 630 MCT
Battery Data					
Max. direct current measurement (A)	60	80	100	100	1-9999A (with CT)
Direct Voltage measurement between phases	/	176-458V	/	147-480V	50-950V
					50-550V
Direct measurement between phase and neutral	176~264V	100-265V	176~276V	85~480V	20-550V
Accuracy Class					
Active power	Class1				
Reactive power	Class2				
Power Supply					
Power consumption	≤1W / 8VA	≤1.5W / 6VA	≤2W / 10VA	≤2W / 10VA	≤2W / 10VA
AC power supply input voltage	176-264V	100-265V	176-276V	85-480V	85-275V / 120-380V
AC power supply input frequency	50/60Hz		50Hz	50/60Hz ±2%	50/60Hz ±2%
Generation Specifications					
Dimenstions (L/H/W) in mm	36×85×66	100×72×66	36×99×63	72×100×66	72×94.5×65
Weight (kg)	0.21	0.44	0.21	0.42	0.29
Mounting options	DIN Rail				
Degree of protection	IP51				
Display	LCD				
Communication interface	RS485				
Max. number of devices to connect	32				
Regulated working temperature range	-25°C to +55°C	-10°C to +45°C	-25°C to +55°C		
Limited working temperature range	-40°C to +70°C	25°C to +75°C	/		
Humidity	≤75%		0-95%, non-Condensing		
Warranty	1.5 years				

Typical Application Diagram

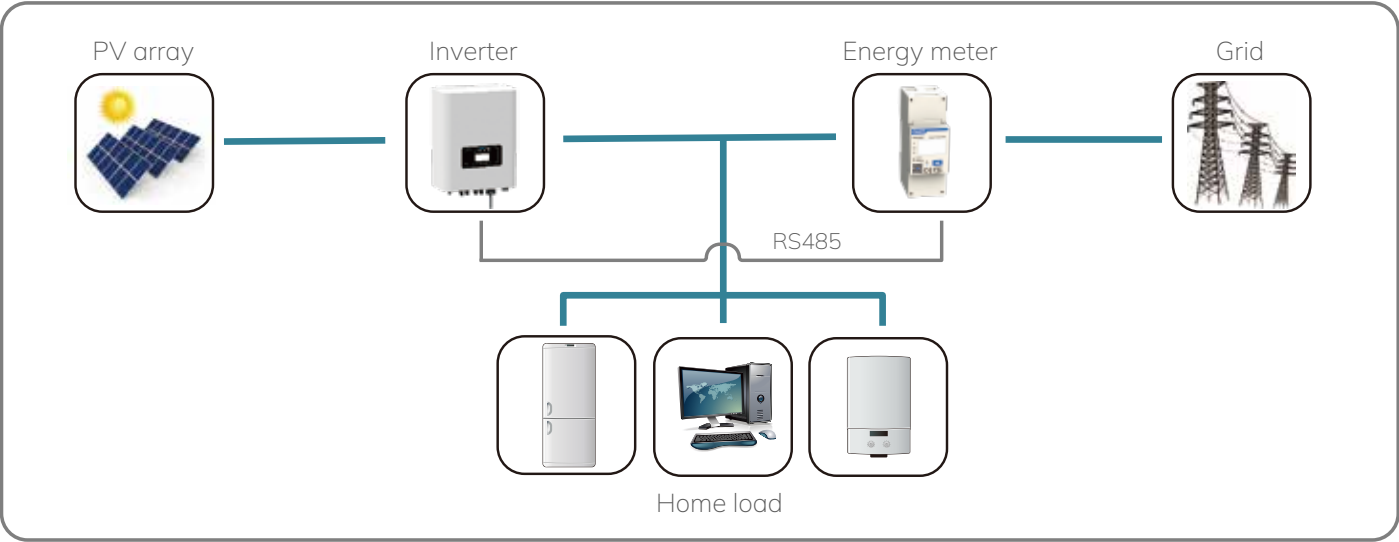

Stick Logger

GPRS / WIFI / 4G / Ethernet
Monitor your system anywhere in the world.



- ◆ External light indicator, logging status at a glance;
- ◆ Plug & play, pick power within inverter, no external power needed, easy to install;
- ◆ Independent from inverter to protect parts inside inverter, eliminate potential problems;
- ◆ IP65 water-proof design, resistant to bad weather, enhance stability;
- ◆ External design, easier to replace faulty equipment;
- ◆ End-user can monitor yields at any time with SOLARMAN APP.

Technical Data

Product Model	LSG-3	LSG-4	LSW-3	LS4G-3	LSE-3
Remote Communication Interface	GPRS	GPRS	WiFi	4G	LAN
Working Frequency	GSM850 / EGSM900 / DCS1800 / PCS 1900MHz	GSM850 / EGSM900 / DCS1800 / PCS 1900MHz	2.142GHz~2.484GHz	704MHZ-960MHZ 1710MHZ-2690MHZ	Adaptive Network; 10M / 100M
Satellite Positioning	/	GPS / Beidou < 15m	/	/	/
Antenna	External GPRS Stick Antenna	External GPRS Stick Antenna	External WiFi Stick Antenna	External 4G Stick Antenna	/
Data Interface	RS485 / RS232 / TTL				
Working Voltage	DC4.7V~DC15V				
Working Power	3W	3W	1.5W	5W	1W
SIM Card	Chip Card / MicroSIM	Chip Card / MicroSIM	/	MicroSIM	/
Memory	2M Flash (2M-16M Optional)				
Working Temperature	-40°C - +85°C				
Working Humidity	< 90% (No Condensing)				
No.of Connections	One				
Serial Communication Rate	bps (1200-115200bps Configurable)				
Data Acquisition Interval	Default 5min (1-15min Configurable)				
User Configuration	AT+InstructionSet				
	Remote Server				
	Bluetooth		APP / Web	Local Serial Port	Web
Firmware Upgrade	Remote Upgrade				
Others	Real-time Control, Data resuming				

Stick logger supports GPRS, WIFI, 4G, Ethernet and other communication modes. Its bluetooth function enables local debugging configuration to collect operation and power generation data from inverters. It pairs with solarman professional platform to enable remote PV system monitoring and to realize distributed power station management with lower cost and higher efficiency.

Smart PV Management Platform



Deye residential monitoring solution takes great care to ensure that your PV system is in excellent operation throughout its entire life-cycle. This monitoring solution offer you details information of your power generating plant including Today energy, Monthly energy, yearly energy, total energy etc, through wireless communication with your router to the internet by a smart wifi plug. User can easily access to the monitoring page via PC web or phone APP.

Maximum your energy output while minimizing your costs. Scan the QR code to build your power station



Efficiency

- Open station supports one-click installation and registration;
- Problem support one-click dispatch and navigation.



Safe

- Safe operation, traceable logs, etc;
- Support full lifecycle data storage to ensure data security and reliability.

